


# The disruptive **visually lossless** light **video compression, extremely tiny** in **FPGA**

## A TECHNOLOGY SERVING THE GLOBAL AV INDUSTRY

TICO is a new visually lossless compression specifically designed for the industry. This revolutionary technology is extremely tiny in FPGA fitting the smallest Xilinx Artix-7 and Spartan-6 devices, robust for real-time operation with no latency.

Up to now, image and video are sent or stored uncompressed into many displays and systems such as cameras, videos servers or recorders. TICO is a smart upgrade path to manage higher resolutions (4K, 8K ...) and frame rates while assuring visual quality, keeping power and bandwidth at a reasonable budget and reducing significantly the complexity and cost of the system.

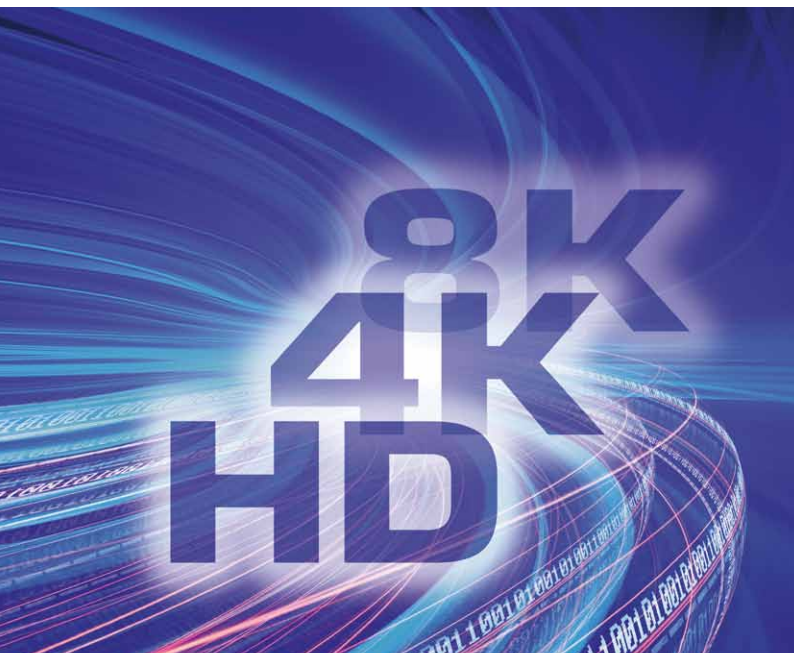

### Technology benefits

- > Visually Lossless quality:
  - Up to 4:1
  - Robust over multiple encoding generations
  - Math. lossless at lower compression ratio
- > Fixed latency: down to microseconds
  - Selectable from 2 to x pixel lines
- > Very low FPGA resource requirement:
  - No external memory - only compressed line buffer
  - Low power consumption
- > Powerful, real-time or faster than real-time in CPU
- > Compatible with different resolutions, from mobile, HD to 4K/8K UHDTV, via multiple usual transport schemes
- > Designed to be a standard for industry-wide support: TICO compression technology is available on multiple software and hardware technologies code, hardware IP-cores and software libraries are available
- > SMPTE RDD35 Compliant: TICO over IP (SMPTE2022 5/6 & RTP) and over SDI infrastructures (4K over 3G-SDI)



## Typical applications from HD to Ultra HD

- Video over IP systems (SMPTE2022, VSF TR03, AVB, ...)
- Video servers, routers and switchers
- Cameras (high-res, real-time or high speed)
- Video monitors and displays
- Frame grabbers and video capture devices
- Cable extenders
- UHD/4K over 3G-SDI, over 10GbE
- UHD/8K over 12G-SDI, over 25GbE/40GbE, ...
- Video recorders & players
- (...)

## TICO is a smart solution to

- Support higher data stream using existing systems & infrastructures (HD/4K/8K/HFR)
- Increase the number of streams or the stream resolution
- Reduce the internal video bandwidth (and power!)
- Cost effectively increase video buffer and storage capacity
- Reduce the number of lanes needed to transport a stream at a display interface or at an image sensor to save power, cost or both

## FPGA implementation

### Image features

- Color modes : 4:0:0, 4:2:0, 4:2:2 and 4:4:4, RGB, YCbCr, XYZ, RAW bayer
- Bit Depth : 8, 10 or 12
- Resolutions : Any up to 8K (8192 x 8192)
- Frame Rates : Any (depending on intoPIX IP-core configuration)

### Compression

(Latency, Quality, Rate Control)

- (Sub) Intra-frame
- Real-time operation guaranteed (no overflow or underflow)
- Fixed latency
  - Selectable from 3 lines up to 11 at decoder, from 6 lines up to 18 at encoder, lowest latency is with Profile 1
- Adjustable rate for Lossy/Visually lossless (up to 4:1) /Math. lossless (1.2:1 to 1.8:1)
- CBR (constant bit rate) operation (optional capped VBR mode)
- TICO Profile 1 & 2 support
- SMPTE RDD35 compliant
- Embedded x2 downscaler option in Decoder

### FPGA

- Low cost implementation in any Xilinx FPGAs: very low FPGA logic and internal RAM usage
- Fit in the smallest Xilinx Spartan-6, Artix-7, Kintex-7 and Kintex Ultrascale
- Encoder and decoder have approximately the same complexity
- IP-core customizable per application, delivered within a HDK to speed up the integration
- Various pixel per clock implementations

## FPGA IP-Cores releases

Reference IP-cores (Profile 1 or 2, -Enc or -Dec)	Video formats				Target Xilinx FPGA	
	Max Resolution	Max FPS	Color Sampling	Bit Depth	Low end FPGAs Xilinx Spartan-6 & Artix-7	High end FPGAs Xilinx Kintex-7, Virtex-7 & Ultrascale
<b>HDTV/2K</b>						
IPX-TICO-HD-60-422	1920x1080	60	4:2:2	10	✓	✓
IPX-TICO-HD-120-422	1920x1080	120	4:2:2	10	✓	✓
IPX-TICO-HD-180-422	1920x1080	180	4:2:2	10	✓	✓
IPX-TICO-HD-240-422	1920x1080	240	4:2:2	10	✓	✓
IPX-TICO-HD-360-422	1920x1080	360	4:2:2	10	/	✓
<b>UHD/4K</b>						
IPX-TICO-UHD4K-60-444	2048x1200	60	4:2:2 / 4:4:4	8,10,12	✓	✓
IPX-TICO-UHD4K-120-444	2048x1200	120	4:2:2 / 4:4:4	8,10,12	✓	✓
IPX-TICO-UHD4K-240-444	2048x1200	240	4:2:2 / 4:4:4	8,10,12	✓	✓
<b>UHD/8K</b>						
IPX-TICO-UHD4K-60-422	3840x2160	60	4:2:2	10	✓	✓
IPX-TICO-UHD4K-120-422	3840x2160	120	4:2:2	10	✓	✓
IPX-TICO-UHD4K-180-422	3840x2160	180	4:2:2	10	/	✓
<b>UHD/2K</b>						
IPX-TICO-UHD4K-60-444	4096x2160	60	4:2:2 / 4:4:4	8,10,12	✓	✓
IPX-TICO-UHD4K-120-444	4096x2160	120	4:2:2 / 4:4:4	8,10,12	/	✓
<b>UHD/2K/8K</b>						
IPX-TICO-UHD8K-60-422	7680x4320	60	4:2:2	10	/	✓
IPX-TICO-UHD8K-120-444	7680x4320	120	4:4:4	10	/	✓*

\*Available in pre-order only.

### CONTACT INTOPIX FOR YOUR OWN CUSTOM IP-CORE CONFIGURATION

**HEADQUARTERS: intoPIX SA**  
 Rue Emile Francqui 9  
 B-1435 Mont-Saint-Guibert - Belgium  
 Tel.: +32 10 23 84 70  
 sales@intopix.com

**CHINA:** sales.hypersilicon@intopix.com  
 sales.waterstone@intopix.com  
**INDIA:** sales.india@intopix.com  
**ISRAEL:** sales.israel@intopix.com  
**JAPAN:** sales.japan@intopix.com  
**USA:** sales@intopix.com